

Upgrading 32G Storage, No Miss of Precious Moments

 **32G**

The storage space updated to 32G ,
more worth-recording moments can be captured and preserved.

Model	 TH 35
Detector Resolution	464×464
Pixel Pitch, μm	12
NETD, mK	≤40
Frame Rate, Hz	50
Objective Lens, mm	35
Field of View	8.8×8.8
Magnification, ×	3.0-9.0
Eye Relief, mm	50
Detection Range (Target size:1.7m×0.5m,P(n)=99%)	1816
Display	1.39" OLED
Battery	Built-in 2 18650 battery packs Replaceable 18500 battery
Max. Battery Life , h	11.5
Weight (without batteries-18500), g	<850
Dimension, mm	375×85×75
Interface	Type-C
Storage, G	32



IRay Technology Co., Ltd.

Tel: 400-998-3088

Fax: +86-535-3410604

Mail: infirayoutdoor@infray.com

Web: www.infirayoutdoor.com

Add: 11th Guiyang Street, YEDA, Yantai 264006, P.R.China



Meet **Tube** Series (BOLT in the US)

TH35


Following the classic Tube appearance design by looking like a day riflescope. TH35 expresses an advanced and brilliant creation out of Tube series by using the 1.39 round screen. The 1.39 round screen will bring a whole different sense of experience by offering a much bigger view. For whom value tradition and pursue technology improvement , TH35 is a go- to choice .



Better Image Quality Better Observing Experience

 **12 μm**
Pixel Pitch

Featuring the self-researched, high-performance 12um detector, it provides high quality and detailed images.

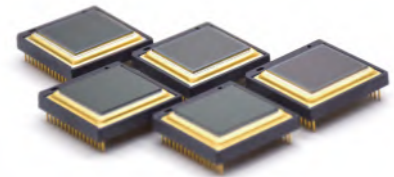

 **1.39"** Round Screen

The application of 1.39" round screen is groundbreaking and innovative in the thermal scope industry. The grand view brought by 1.39" round screen can present a more comfortable and pleasant observing experience.



200 m

600 m

1000 m

1400 m

1800 m

 **Ultraclear Mode**

When ultraclear mode is on, bad weather condition effect is off. With ultraclear mode, TH35 can still provide a clear and detailed image even in bad weather conditions such as heavy fog and rain. Bad weather can't slow you down.




High Reliability, Sufficient Operation Time

 Sufficient Operation Time

 **11.5h+**

Build-in batteries work for 8 hours, and with an additional 18500 battery for back up, working time of TH35 will be 11.5 hours.




 **High Shock Resistance**


1000G

The high shock resistance of TH35 is up to 1000G, it ensures the reliability of TH35.

Diopter Adjustment Free

 In order to avoid inconvenient diopter adjust operations for users, InfiRay has innovatively developed one feature on TH35-- no need to adjust diopter. The clarity of image is demonstrated in the range of -4D without diopter adjustment, as well as expanded to +3D through extra accessories.

Classic inheritance Go-to-choice for Traditional Ones

 Full aluminium housing guarantees the reliability of TH35, applicable for 30 mm diameter pipe, the appearance allows TH35 to be installed on standard 30 mm scope rings, with simple operation, high stability.

